


PRECAST CONCRETE ABOVE GROUND (AG)

STORM SHELTER PAD

8'-0" WIDE X 10'-0" LONG X 6" THICK OVERALL DIMENSIONS
TO BE USED WITH THE VCP-SS-5363-AG STORM SHELTER

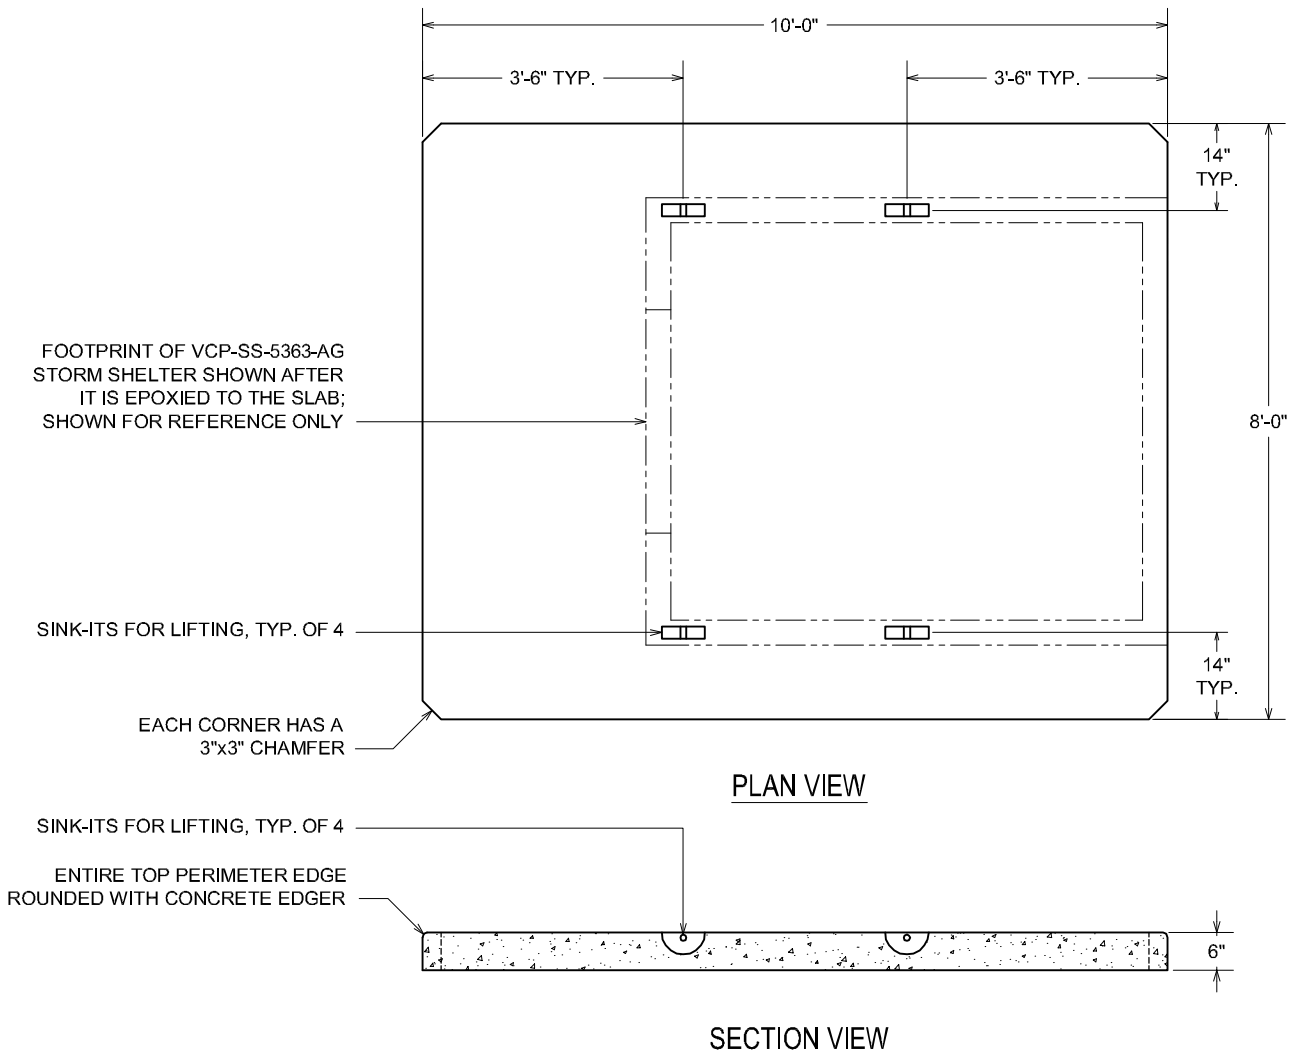

FOOTPRINT OF VCP-SS-5363-AG
STORM SHELTER SHOWN AFTER
IT IS EPOXIED TO THE SLAB;
SHOWN FOR REFERENCE ONLY

SINK-ITS FOR LIFTING, TYP. OF 4

EACH CORNER HAS A
3"x3" CHAMFER

SINK-ITS FOR LIFTING, TYP. OF 4

ENTIRE TOP PERIMETER EDGE
ROUNDED WITH CONCRETE EDGER

WEIGHTS:

- PAD WEIGHS APPX. 5,900 LBS.

NOTES:

- CONCRETE: 4000 P.S.I. MINIMUM
- REINFORCING: GRADE 60 MINIMUM
- COLOR: STANDARD GRAY CONCRETE
- FINISH: SMOOTH HAND TROWEL FINISH

PAD DELIVERED USING A SEMI-TYPE BOOM TRUCK
WITH LIMITED REACH; SUFFICIENT ACCESS IS
NECESSARY TO SET THE PAD IN PLACE

PAD CAN BE DELIVERED & SET IN PLACE ON A
LEVEL & PROPERLY PREPARED SHELTER LOCATION

ACTUAL DIMENSIONS OF CONCRETE PRODUCTS MAY VARY SLIGHTLY

vaughn
concrete products, inc.

DRAWING NOT TO SCALE

STORM SHELTER PAD, 5363-AG.DWG
DATE CREATED: 12/08
UPDATE: -----

12650 Tucson Street • Henderson, Colorado 80640 • 303-659-3747, Fax 303-659-1333
2671 South Greeley Hwy • Cheyenne, Wyoming 82007 • 307-634-0695, Fax 307-634-0694
10021 Amarillo Blvd East • Amarillo, Texas 79108 • 806-374-3747, Fax 806-335-3717