

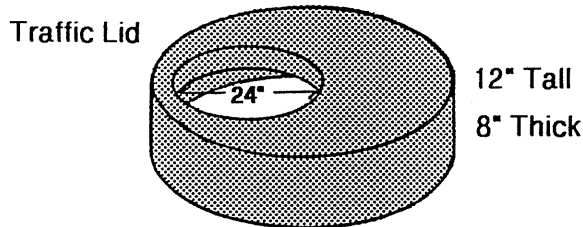
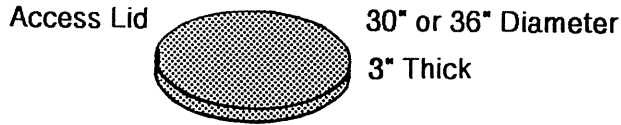


Precast Concrete
MANHOLE
Perforated Ring

These may be used alone
or interchanged with
solid manholes

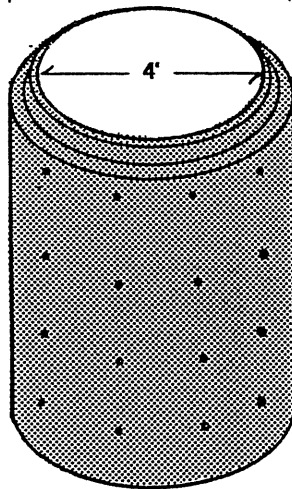

Standard ring is perforated with
1/2" diameter holes at
approximately 12" O.C.E.W.



All sections are normally
tongue and groove

Varies in even
foot increments

Available with steps
if needed

Inlet and Outlet holes
can be cast in on
special order

The rings may be purchased
with or without a base

Concrete minimum strength 4000 lbs. PSI at 28 days

Weight: 850 lbs. per ft.

Actual dimensions of concrete products may vary slightly

vaughn
concrete products, inc.

12650 Tucson Street • Henderson, Colorado 80640 • 303-659-3747, Fax 303-659-1333
2671 So. Greeley Hwy • Cheyenne, Wyoming 82007 • 307-634-0695, Fax 307-634-0694
10021 Amarillo Blvd. East • Amarillo, Texas 79107 • 806-374-3747, Fax 806-335-3717